





SERIE 840

FISSAGGIO LATERALE O INCASSO
USCITA SEMPLICE



Codice lunghezza Length code	Max prof. cassetto Max drawer depth A mm	Lunghezza Length E mm	Lunghezza Length I mm	Corsa Extension C mm
19	294	182	182	224
22	358	214	214	288
25	422	246	246	352
28	486	278	278	416
31	550	310	310	480
34	614	342	342	544
37	678	374	374	608
40	742	406	406	672
43	806	438	438	736

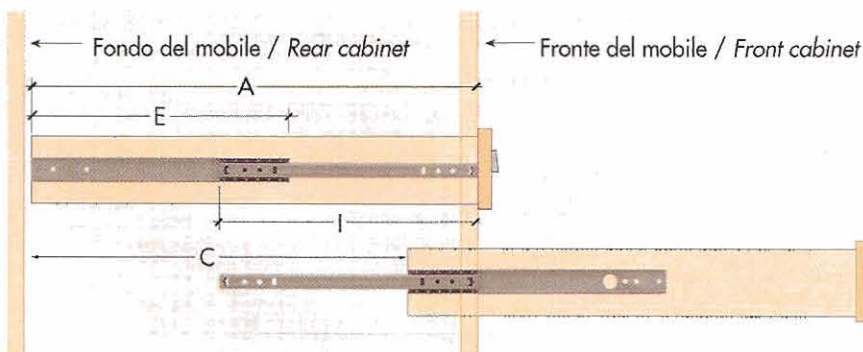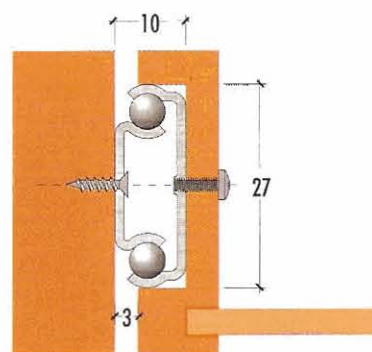

- Scorrimento silenzioso su sfere.
- Montaggio sul fianco del cassetto con inserimento in una scanalatura di 27 mm e bloccaggio con una vite M4.
- Lunghezza guida inferiore alla profondità del cassetto.
- Profilo per il fianco con foratura a passo 32 mm
- Portata per coppia: 15 kg
- Montaggio con viti a testa svasata Ø 3 mm
- Finitura: zincatura, bianca o nera.

MEDIUM BALL BEARING RUNNER 80% EXTENSION

- Silent movement on ball-bearing.
- Both 27 mm groove and surface mounting.
- 80% extension (x2) two way travel.
- 32 mm fixing hole pattern on cabinet member.
- 15 kg load rating.
- Minimum section: 27 x 10 mm
- Fixing with wood screws 3 Ø mm
- To achieve optimum travel locate rear of drawer member at rear of drawer and cabinet member as far forward as possible.
- Finish: bright or black zinc-plated.

