



# profiles for joining existing floors

## folostrip™ ST



**FOLOSTRIP** profile is generally fixed to link two adjacent floors of similar or different height and covering materials. The rounded shape of this strip profile grants a maximum height difference of 5 mm. To apply **FOLOSTRIP** means also to cover up the slight imperfections which may occur during the laying job. It can also be used as a terminal profile provided that the thickness of the surface material does not exceed 5 mm. Illustrated scale dimension 1:1

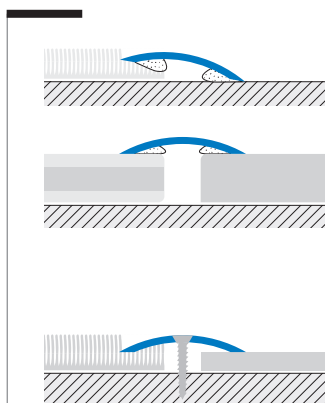

### Installation for self-adhesive version:

- 1) Check if support is sound, smooth, clean, dry and free from grease and loose materials.
- 2) Cut profile to the required length and remove the protective film.
- 3) Press downwards on the profile until it is fixed firmly. Do not hammer.

### Installation for pre-drilled version:

- 1) Cut profile to the required length and place the mark on the surface of the profile pre-drilled holes.
- 2) Insert and fix the flare head screws.



### FOLOSTRIP ST-OL\* Polished Brass

A laminate polished brass flat bar which is resistant to light mechanical and chemical impacts and lasting wear. The brass article allows an extremely elegant decorative finish to homes and is available in pre-drilled or self adhesive versions. Available also in the heavy duty version, thickness 1,3 mm, Code STP 30 OLA/F.

Material: Laminated Polished brass  
 Length: 2,70 metres  
 Lengths ☒: 0,90 / 1,35 m  
 Widths: 18, 30, 35 mm  
 Profile covered with protective film strip

B=mm	Art.	self-adhesive	drilled
18	ST 18	OLA	
30	ST 30	OLA	OLF
35	ST 35	OLA	OLF

### FOLOSTRIP ST-IL\* Polished Stainless Steel

Stainless steel profile with a high resistance to wear and a good resistance to atmospheric agents. Available in pre-drilled or self adhesive versions.

Material: Polished Stainless steel  
 Length: 2,70 metres  
 Lengths ☒: 0,90 / 1,35 m  
 Widths: 18, 30, 35 mm  
 Profile covered with protective film strip

B=mm	Art.	self-adhesive	drilled
18	ST 18	ILA	
30	ST 30	ILA	ILF
35	ST 35	ILA	ILF

### FOLOSTRIP ST-A\* Anodised Aluminium

Full aluminium anodised profile available in Silver - Gold - Bronze finishes. This product confers a chromatic combination with indoor decoration with all floor covering materials.

Material: Extruded Anodised aluminium  
 Length: 2,70 metres  
 Lengths ☒: 0,90 / 1,35 m  
 Widths: 18, 30, 35, 40 mm  
 Colours\*: Silver, Gold, Bronze

B=mm	Art.	self-adhesive	drilled
18	ST 18	A*A	A*F
30	ST 30	A*A	A*F
35	ST 35	A*A	A*F
40	ST 40	A*A	A*F

### FOLOSTRIP ST 30\* Aluminium Wood Cladding Finish

Profile with a melamine wood tone in 6 different varieties. Good tolerance to abrasion comparable to most melamine coverings. The melamine embossing on the aluminium is particularly smooth therefore it remains quite clean and blends well with the flooring tone.

Material: Extruded Alum. laminate covered  
 Length: 2,70 metres  
 Lengths ☒: 0,90 / 1,35 m  
 Width: 30 mm

Finish	self-adhesive	drilled
Maple	ST 30 ACA	ST 30 ACF
Beech	ST 30 FAA	ST 30 FAF
Oak	ST 30 ROA	ST 30 ROF
Cherry	ST 30 CIA	ST 30 CIF
Light walnut	ST 30 NCA	ST 30 NCF
Dark walnut	ST 30 NSA	ST 30 NSF

A wide choice of transition and threshold strip profiles with a variety of widths and top detailing such as knurling, rounded edges or simply flat and/or heavier bars for better fitting under doorways. This variety is to best customize residential finishing and adapt to any decorative environment. The extruded brass and aluminium models are suitable for heavier transit areas.

Illustrated scale dimension 1:1




#### FOLOSTRIP ST 38 A\* Anodised Aluminium

A top knurled bar in silver color finish, gold or bronze with an approx. 20 micron coating. High tolerance to corrosion but limited resistance to mechanical impact. The mid-section thickness is 3,7 mm.

Material: Extruded Anodised aluminium

Length: 2,70 metres

Colours\*: Silver, Gold, Bronze



B=mm	Art.	self-adhesive drilled	
38	ST 38	ASA	ASF
38	ST 38	AOA	AOF
38	ST 38	ABA	ABF

#### FOLOSTRIP STB-OL\* Polished Brass

The brass article ensures an excellent tolerance to impact and chemical environments. Therefore it is ideal for industrial or commercial areas where heavier transit occurs. Also suitable in residential areas where brass is always appreciated. The mid-section thickness is 1,5 mm.

Material: Extruded Polished brass

Length: 2,70 metres

Lengths ☒ : 0,90 / 1,35 metres

Product packaged with protective film strip



B=mm	Art.	self-adhesive drilled	
30	STB 30	OLA	OLF
35	STB 35	OLA	OLF
40	STB 40	OLA	OLF

#### FOLOSTRIP ST 50 OL\* Polished Brass

A heavy cambered brass profile with 5 mm, thickness mid-section. Designed to guarantee resistance to chemical and mechanical impact present in commercial or industrial areas with heavier transit.

Material: Extruded Polished brass

Length: 2,70 metres

Product packaged with protective film strip



B=mm	Art.	self-adhesive drilled	
50	ST 50	OLA	OLF

#### FOLOSTRIP STB 25 A\* Anodised Aluminium

This top grooved flat head profile has an approx. 20 micron silver coating. Good anti-oxidation tolerance but less to mechanical impact. Mid-section thickness: 2,2 mm.

Material: Extruded Anodised aluminium

Length: 2,70 metres

Lengths ☒ : 0,90 / 1,35 metres

Colours\*: Silver, Gold, Bronze



B=mm	Art.	self-adhesive drilled	
25	STB 25	ASA	ASF
25	STB 25	AOA	AOF
25	STB 25	ABA	ABF

#### FOLOSTRIP STB 35 A\* Anodised Aluminium

This flat head aluminium smooth heavy duty aluminium profile has an approx. 20 micron coating and is coloured finished in silver, gold or bronze. The pre-drilled version has its holes placed in the middle. One may opt for the side holes for the code L version. The mid-section thickness is 2,4 mm.

Material: Extruded Anodised aluminium

Length: 2,70 metres

Lengths ☒ : 0,90 / 1,35 metres

Colours\*: Silver, Gold, Bronze



B=mm	Art.	self-adhesive drilled	
35	STB 35	ASA	ASF
35	STB 35	AOA	AOF
35	STB 35	ABA	ABF