
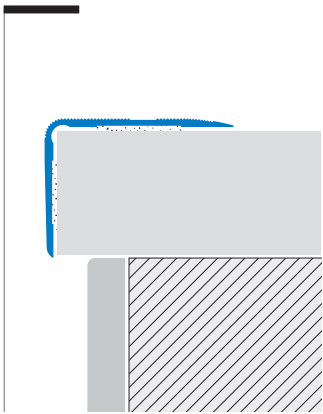


aluminium safety step stair nosing profile

FOLOSTAIR SE is an aluminium anodised profile for stairs with an approx. 20 micron finish coating to apply post laying job. It may be fixed either with screws or adhesive glue. It is meant to satisfy both indoor and outdoor stair nosing situations as it bears high tolerance against oxidation. This profile is developed with a top grooved surface and is also supplied with a chamfered edge to better ensure the safety step. Available in different sizes either with a rounded or blunt corner, it is the ideal solution for refurbishing damaged steps and to cover possible defects of cutting or matching in pre-existing surfaces.

Illustrated scale dimension 1: 1,2


folostair™ SE

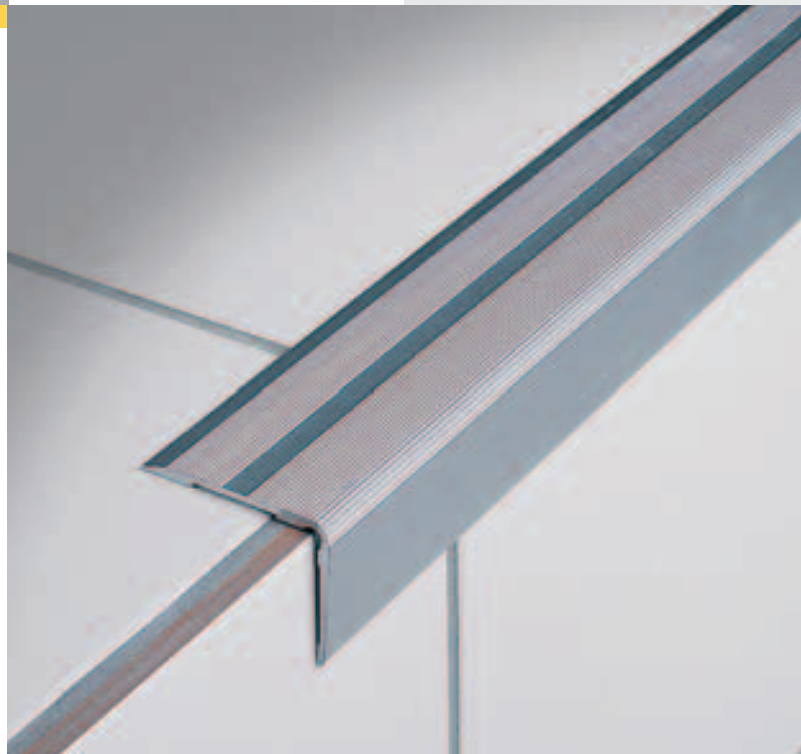

FOLOSTAIR SE 42 A*N Anodised Aluminium

Step edge profile slightly chamfered with detailed top grooved surface. For high traffic installations we recommend to prefer the silver finish.

Material: Extruded Anodised aluminium
Length: 2,70 meters
Colours*: Silver, Gold, Bronze




BxH	Art.
42x22	SE 42 ASN
42x22	SE 42 AON
42x22	SE 42 ABN

FOLOSTAIR SE 45 A*N Anodised Aluminium

Step edge profile with top surface entirely grooved including chamfered external corner. The internal grooves of the vertical flange enhance the glue grip on the pre-laid covering. For high traffic installations we recommend to prefer the silver finish.

Material: Extruded Anodised aluminium
Length: 2,70 meters
Colours*: Silver, Gold, Bronze



BxH	Art.
45x33	SE 45 ASN
45x33	SE 45 AON
45x33	SE 45 ABN