

Glazed-in louvre, pitch 33

Material

- Made from aluminium sections: AlMgSi 0.5 (according to EN 12020-2)
- Stainless steel 304 insect screen (2.3 x 2.3 mm) or mesh (6 x 6 mm) on request
- Finishing: anodized in satin/bronze colour (20 micron) or powder-coated in any RAL or Syntha Pulvin colour (40 micron)

Dimensions

- Blade pitch: 33,3 mm
- Frame thickness: 24, 28 or 32 mm
- Minimum dimensions: 130 x 130 mm
- Specify on ordering: width x height in mm (overall dimensions)

Fixing


- Suitable for 24, 28, 32 mm glazing sections. Other thicknesses on request.

Options

- Water channel
- Removable mesh
- Filter
- Pressure-relief louvre

Typical applications

- Nightcooling

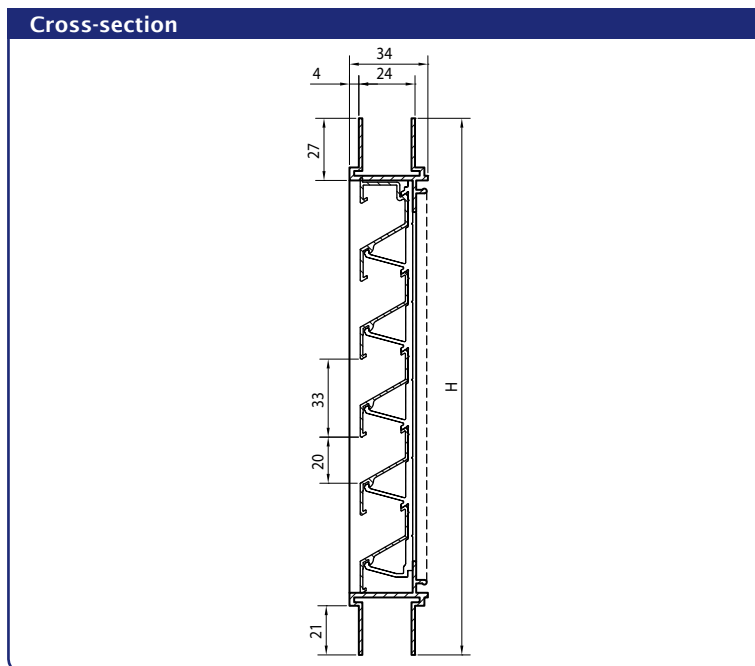

Technical specifications	
	414
Airflow	(EN 13030)
K-factor (supply)	23,56
K-factor (discharge)	25,51
C _e coefficient	0,206
C _d coefficient	0,198
Technical data	
Visual free area	59 %
Physical free area	45 %
IP class (louvre with mesh; electrical installation at least 100mm from louvre)	IP2XD



Pressure-relief grille

Combination of a pressure-relief louvre type 433 and a louvre type 414

