

## 415VA < Glazed-in louvres



### Controllable louvre with chevron section blade

#### Material

- Made from aluminium sections: AlMgSi 0.5 (according to EN 12020-2)
- Stainless steel 304 mesh (6 x 6 mm) or insect screen (2.3 x 2.3 mm) on request
- Finishing: anodized in satin/bronze colour (20 micron) or powder-coated in any RAL or Syntha Pulvin colour (40 micron)

#### Dimensions

- Blade pitch: 20 mm
- Frame thickness: 24, 28 or 32 mm
- Specify on ordering: width x height in mm (overall dimensions)
- Controllable in combination with 100, 130 and 150 mm hit-and-miss ventilators or with insulated aluminium door (415/D)
- Minimum dimensions: 130 x 130 mm

#### Fixing

- Suitable for 24, 28, 32 mm glazing sections. Other thicknesses on request.

#### Control options (1 control panel per module)


- Standard: knob control
- Rod
- Cord
- Motor

#### Typical applications

- Classrooms



#### Cross-section

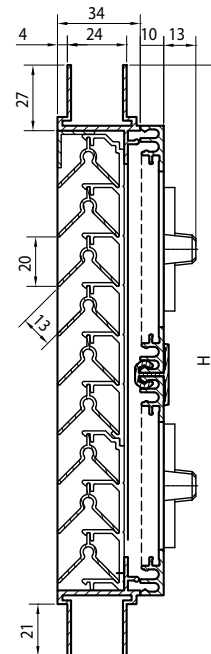

#### Technical specifications

	415VA
Airflow	(EN 13030)
K-factor (supply)	34,24
C <sub>e</sub> coefficient	0,171
<i>(For combination with 100, 130 and 150 vents)</i>	