

425GL < Glazed-in louvres



Glazed-in louvre, extra-heavy-duty series

Material

- Made from aluminium sections: AlMgSi 0.5 (according to EN 12020-2)
- Stainless steel 304 mesh (6 x 6 mm) or insect screen (2.3 x 2.3 mm) on request
- Finishing: anodized in satin/bronze colour (20 micron) or powder-coated in any RAL or Syntha Pulvin colour (40 micron)

Dimensions

- Blade pitch: 95 mm
- Depth to fit: 81.5 mm
- Frame thickness: 24 mm (frame thickness of 8 to 50 mm on request)
- Specify on ordering: full width x height in mm
- Minimum dimensions: 385 x 385 mm


Fixing

- Suitable for 24, 28, 32 mm glazing sections. Other thicknesses on request.

Options

- Water channel
- Drainage profile
- Removable mesh
- Filter

Cross-section

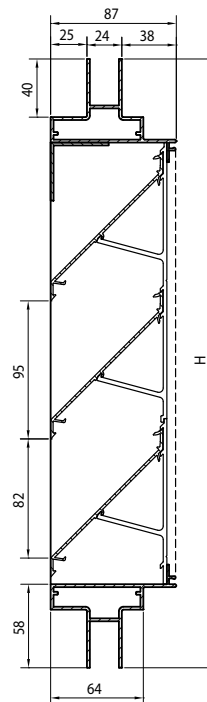

Technical specifications

	425GL
	(EN 13030)
Airflow	
K-factor (supply)	11,41
K-factor (discharge)	11,65
C _e coefficient	0,296
C _d coefficient	0,293
Technical data	
Visual free area	86 %
Physical free area	55 %