

“Storm” wall louvre, pitch 33

Material

- Made from aluminium sections: AlMgSi 0.5 (according to EN 12020-2)
- Stainless steel 304 mesh (6 x 6 mm) or insect screen (2.3 x 2.3 mm) on request
- Finishing: anodized in satin/bronze colour (20 micron) or powder-coated in any RAL or Syntha Pulvin colour (40 micron)

Dimensions

- Blade pitch: 33 mm
- Depth to fit: 29 mm
- Flange size: 21 mm
- Minimum dimensions: 100 x 100 mm

Fixing


- Brackets ref. 418

Options


- Water channel
- Removable mesh
- Filter
- Without flange
- Welded blades on frame (only RAL finish)

Typical applications


- Good weatherability combined with low airflow, applications with a lot of wind, coastal area
- Snow resistant

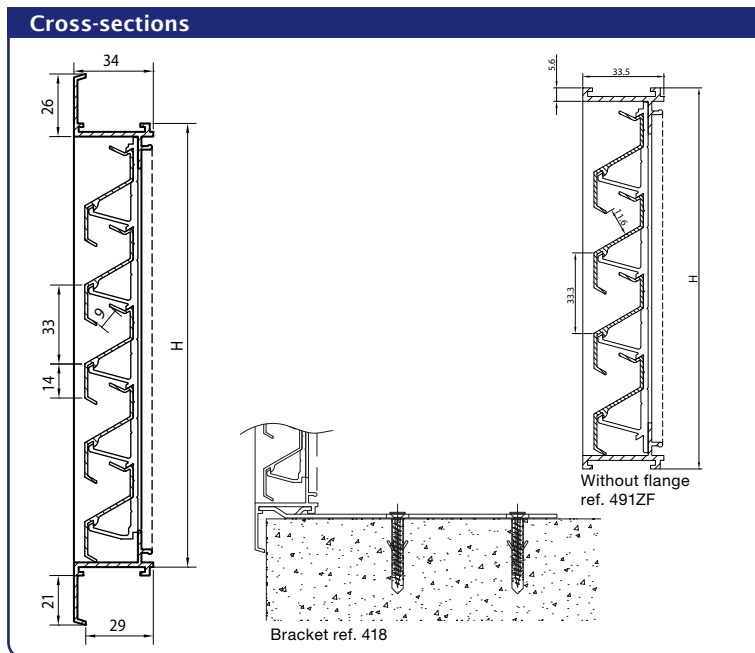

AIRFLOW

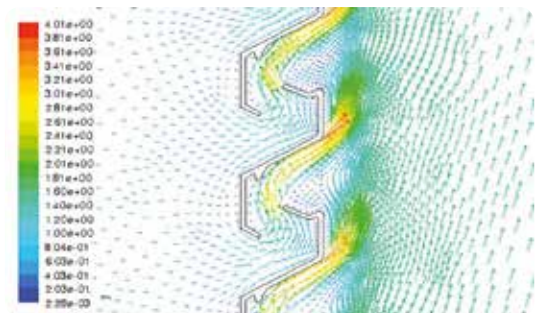

Supply

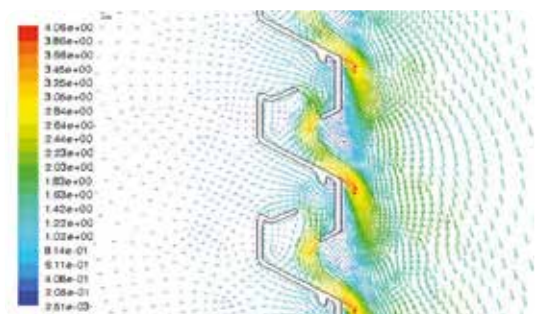

Discharge

Technical specifications	
	491
Airflow	(EN 13030)
K-factor (supply)	123,5
K-factor (discharge)	118,1
C _e coefficient	0,090
C _d coefficient	0,092
Technical data	
Visual free area	57 %
Physical free area	26 %

